

STEP-4





NOW SLIGHTLY PULL OUT THE SIDE LOCK (P23) & SLOWLY BRING DOWN THE TABLE

STEP-5

REPEAT THE SAME FOR THE 2ND HALF OF THE TABLE AS IN STEP- 1, 2, 3 & 4

STEP-6

STEP-1



Attach posts to the left and right side of the table.

STEP-7



Place net onto posts, feed string through grooves.

Adjust tension of the net with the chains.

STEP- 8 ADJUST THE HEIGHT REQUIRED WITH THE HELP OF LEVELLERS (P21) ATTACHED ON ALL 4 OUTER LEGS (P6).

YOUR TABLE IS NOW READY FOR PLAY STORING THE TABLE







PULL OUT THE SIDE LOCK (P23) TO LIFT THE TABLE ON THE WHEELS. MAKE SURE THAT LOCK (P22) IS LOCKED PROPERLY FOR STORAGE

STEP- 2 REPEAT THE SAME FOR THE 2ND HALF.

<u>Safety Instructions:</u> Children below 14 years should not assemble the table. When lowering each half of the table top, make sure that the outer legs P6 are pulled gently outwards from the underside of the table, so far as they can go. Failure to do this may result in injury or damage to the table. This table is suitable for indoor use. It can be used outdoors provided that it is not exposed to direct sunlight rain or frost. It should always be stored indoors. Make sure that the wheel brakes are off when moving the table and are on when the table is stored or in the play position.




Easi Fold Deluxe Indoor Table Tennis Table Assembly Instructions






PARTS LIST

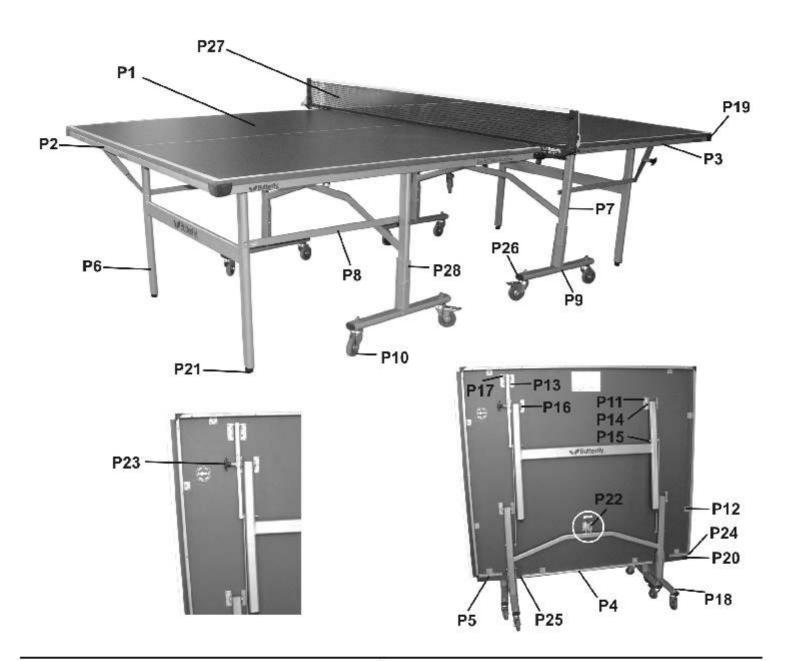

- 1. TABLE TOP 18MM PARTICLE BOARD- 1525×1370×18MM 2 NOS.
- 2. END FRAME PIPE -1490×23×17MM 2 NOS.
- 3. SIDE FRAME PIPE 1310×23×17MM 4 NOS.
- 4. INNER FRAME PIPE 930×23×17MM 2 NOS.
- 5. SMALL INNER FRAME PIPE 150×23×17MM 4 NOS.
- 6. OUTER LEG 940×710×45×25MM 2 NOS.
- 7. INNER LEG -1080×500×45×25MM 2 NOS.
- 8. LONG BRACE SUPPORT 665×25×7MM 4 NOS.
- 9. WHEEL ASSEMBLY- 500×230×45×25MM 4NOS.
- 10. SET OF 8 WHEELS 75 MM WITH 2 LOCK WHEELS
- 11. BRACKETS FOR OUTER/INNER LEG 75×28MM 16 NOS.
- 12. BRACKETS FOR FRAME PIPE 38MM2 20 NOS.
- 13. BRACKETS FOR SIDE LOCK 75×19MM 4NOS.
- 14. BOLTS FOR OUTER/INNER LEG 62×7.5MM 8 NOS.
- 15. BOLTS FOR LONG BRACE SUPPORT FIXED TO OUTER/INNER LEG -75×7.5 - 6 NOS.
- 16. BOLTS FOR SIDE LOCK ATTACHED TO OUTER LEG 88×6MM WITH NUT WASHER AND BHOGLI - 2NOS.

- 17. BOLTS FOR SIDE LOCK ATTACHED TO BRACKET 31×6MM 2 NOS.
- 18. DOME NUT 10MM- 8 NOS.
- 19. OUTER CORNER 43MM 4 NOS.
- 20. SET OF POST CORNER 50×18MM 2 NOS.
- 21. LEVELLERS · 45×25MM CAPSULE 4 NOS.
- 22. CENTRE LOCK 2 NOS.
- 23. SIDE LOCK 2 NOS.
- 24. L CORNER TO ATTACH P3 & P5 23×17MM 4 NOS.
- 25. PLASTIC CAPS FOR INNER FRAME PIPE 23×17MM 8 NOS.
- 26. WHEEL ASSEMBLY CAP 45×25MM 8 NOS.
- 27. NET POST SET 1 NOS.
- 28. BOLTS TO ATTACHED WHEEL ASSEMBLY(P9) WITH INNER LEG (P7) 62×7.5MM 8 NOS.
- 29. SPARE NET 1 NOS.
- 30. SCREW FOR BRACKETS ON TOP 8/32- 48 NOS. 8/13- 216NOS.
- 31. SCREW FOR OUTER CORNER & POST CORNERS 6/13-20 NOS.
- 32. SPANNER 7.5/6MM 2 NOS.



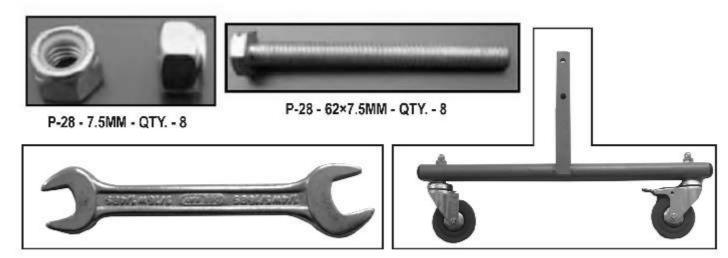

P-32 - 7.5/6 MM - QTY. - 2

P-9 - 500×230×45×25 MM - QTY. - 4

ADULT ASSEMBLY REQUIRED

PLEASE READ THE SAFETY INSTRUCTIONS AT THE BOTTOM OF PAGE- 4

STEP - 1








FIX THE WHEEL ASSEMBLY (P9)TO BOTH INNER (P7) LEGS OF EACH HALF OF THE TABLE USING 62×7.5MM NUT & BOLTS (×8) & TIGHTEN IT WITH THE HELP OF 2 SPANNERS.

STEP-2



BRING DOWN THE TABLE ON WHEELS WITH THE HELP OF TWO PERSONS

STEP-3





SLIGHTLY PULL OUT THE OUTER LEGS (P6) & PUSH OPEN THE TABLE SLIGHTLY BY OPENING CENTRE LOCK (P22).