



STEP- 3



NOW SLIGHTLY PULL OUT THE SIDE LOCK (P23) & SLOWLY BRING DOWN THE TABLE

STEP- 4 REPEAT THE SAME FOR THE 2ND HALF OF THE TABLE AS IN STEP- 1, 2, & 3

STEP- 5



ATTACH POSTS TO THE LEFT AND RIGHT SIDE OF THE TABLE.

STEP- 6



PLACE NET ONTO POSTS, FEED STRING THROUGH GROOVES.

ADJUST TENSION OF THE NET WITH THE PLASTIC STRIP

STEP- 7 ADJUST THE HEIGHT REQUIRED WITH THE HELP OF LEVELLERS (P21) ATTACHED ON ALL 4 OUTER LEGS (P6).

YOUR TABLE IS NOW READY FOR PLAY

STORING THE TABLE

STEP- 1



PULL OUT THE SIDE LOCK (P23) TO LIFT THE TABLE ON THE WHEELS. MAKE SURE THAT LOCK (P22) IS LOCKED PROPERLY FOR STORAGE

STEP- 2 REPEAT THE SAME FOR THE 2ND HALF.

Safety Instructions: Children below 14 years should not assemble the table. When lowering each half of the table top, make sure that the outer legs P6 are pulled gently outwards from the underside of the table, so far as they can go. Failure to do this may result in injury or damage to the table. This table is suitable for indoor & outdoor use.

Make sure that the wheel brakes are off when moving the table and are on when the table is stored or in the play position.




Always cover the table when it is not in use.



Easifold Outdoor Table Tennis Table Assembly Instructions



Butterfly®
PARTS LIST

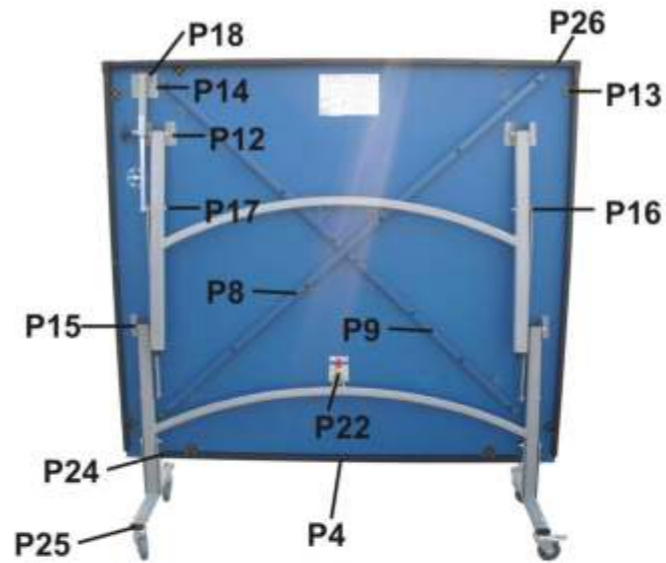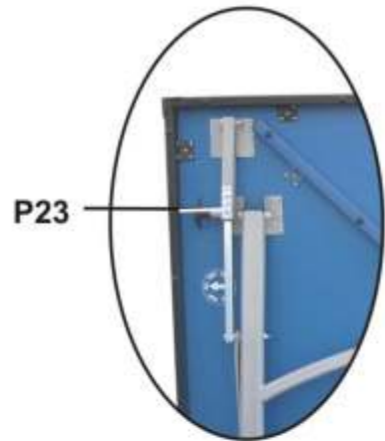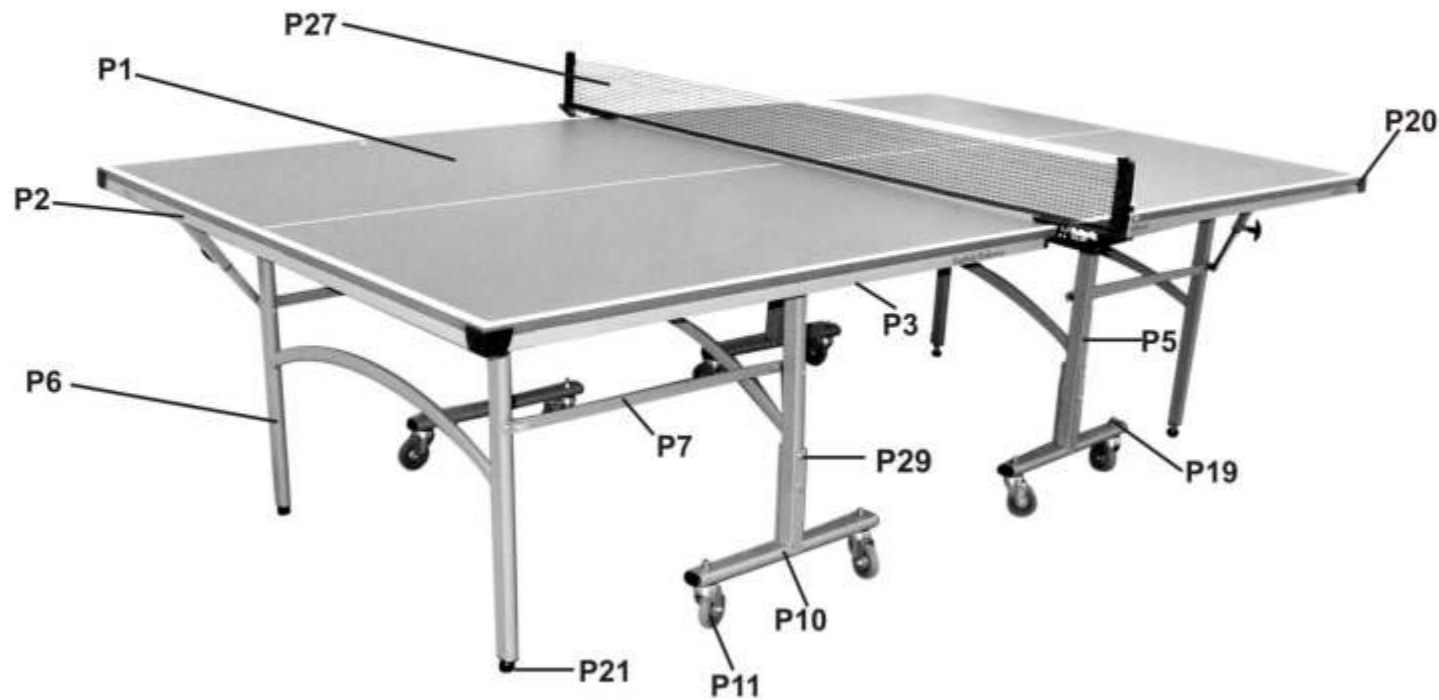


1. TABLE TOP 14MM - 1525×1370×14MM - 2 NOS.
2. END FRAME PIPE -1485×29×19MM - 2 NOS.
3. SIDE FRAME PIPE - 1330×29×19MM - 4 NOS.
4. INNER FRAME PIPE - 1230×29×19MM - 2 NOS.
5. INNER LEG -1370×500×45×25MM - 2 NOS.
6. OUTER LEG - 940×710×45×25MM - 2 NOS.
7. LONG BRACE SUPPORT - 665×25×7MM - 4 NOS.
8. BACK SUPPORT PIPE - 1720×25MM SQ - 2 NOS.
9. BACK SUPPORT PIPE - 800×25MM SQ - 4 NOS.
10. WHEEL ASSEMBLY- 500×230×45×25MM - 4NOS.
11. SET OF 8 WHEELS - 75 MM WITH 2 LOCK WHEELS
12. BRACKETS FOR OUTER/INNER LEG - 75×28MM - 16 NOS.
13. BRACKETS FOR FRAME PIPE - 38MM SQ - 32 NOS.
14. BRACKETS FOR SIDE LOCK - 75×19MM - 4NOS.
15. BOLTS FOR OUTER/INNER LEG 62×7.5MM - 8 NOS.
16. BOLTS FOR LONG BRACE SUPPORT FIXED TO OUTER/INNER LEG - 75×7.5 - 6 NOS.
17. BOLTS FOR SIDE LOCK ATTACHED TO OUTER LEG - 88×6MM WITH NUT WASHER AND BHOGLI - 2NOS.

18. BOLTS FOR SIDE LOCK ATTACHED TO BRACKET - 31×6MM - 2 NOS.
19. DOME NUT - 10MM- 8 NOS.
20. OUTER CORNER - 40MM - 4 NOS.
21. LEVELLERS - 45×25MM CAPSULE - 4 NOS.
22. CENTRE LOCK - 2 NOS.
23. SIDE LOCK - 2 NOS.
24. PLASTIC CAPS FOR INNER FRAME PIPE - 29×19MM - 8 NOS.
25. WHEEL ASSEMBLY CAP - 45×25MM - 8 NOS.
26. SCREW CAPS - 70 NOS.
27. NET POST SET - 1 NOS.
28. SPARE NET - 1 NOS.
29. BOLTS TO ATTACHED WHEEL ASSEMBLY WITH INNER LEG 62×7.5MM - 8 NOS.
30. SCREW FOR BRACKETS ON TOP & FRAME - 6/95
31. SCREW FOR OUTER CORNER - 6/13- 12 NOS.
32. SPANNER - 7.5/6MM - 2 NOS.

Butterfly®



P-29 - 7.5MM - QTY. - 8

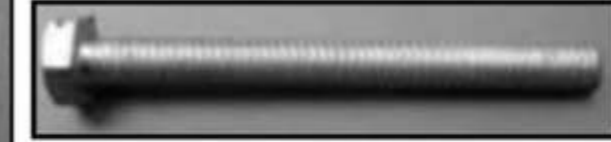

P-29 - 62×7.5MM - QTY. - 8



P-32 - 7.5/6 MM - QTY. - 2



P-10 - 500×230×45×25 MM - QTY. - 4

ADULT ASSEMBLY REQUIRED

PLEASE READ THE SAFETY INSTRUCTIONS AT THE BOTTOM OF PAGE- 4

STEP - 1



CAREFULLY LIFT THE TABLE TOP HALF TO ATTACH WHEEL ASSEMBLY (P10) WITH INNER LEG (P5) USING NUT & BOLT 62×7.5 AND TIGHTEN IT WITH THE HELP OF TWO SPANNERS.



STEP- 2



SLIGHTLY PULL OUT THE OUTER LEGS (P6) & PUSH OPEN THE TABLE SLIGHTLY BY OPENING CENTRE LOCK (P22).